


For standard locks

MODULEC-SH



<https://www.locinox.com/en-gb/gate-hardware/keeps/for-standard-locks/d00000049>

Replace your SHKL keep with an electrical surface mounted keep with Fail Close / Fail Open functionality. Easy to install thanks to the patented Quick-Fix. For 12V-24V and AC/DC. Modulec-SH is available in two versions: E (Emissa - Fail Close) and R (Rupture - Fail Open).

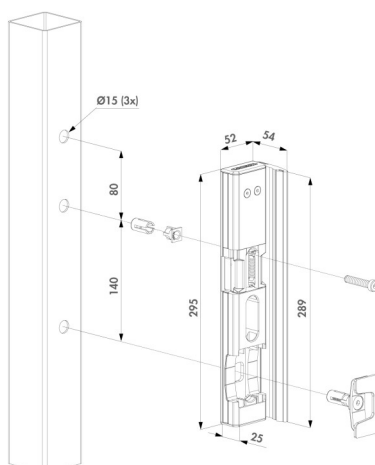

TECHNICAL SPECIFICATIONS

Left-Right Adjustability	Yes
Installation Method	Hexagon Screws (HEX 5) Quick-Fix
Operating Voltage	12V AC/DC 24V AC/DC
Operating Current	0,62A @ 24V 1,25A @ 12V
Power	15W
Minimal Distance Gate - Post	30 mm
IP Rating	54
Materials Main Part(s)	Anodised Aluminium Resin Encapsulated PCB Stainless Steel
Hours of Salt Spray Testing	500
Test Frequency	500000
Years of Warranty	2