




Aesthetical surface mounted keep. Specially designed for our complete range of surface mounted swing gate locks. The limited 8 mm visible thickness ensures a discreet look. A highly efficient assembly with minimal gate preparations is guaranteed, while the unique Quick-Fix ensures a fast and strong fixation on the gate. This unique keep in combination with the gate lock ensures a strong gate anchoring.

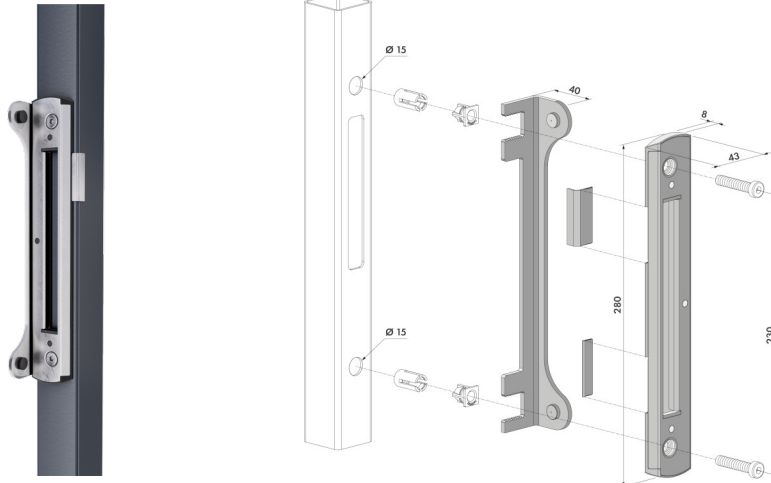

TECHNICAL SPECIFICATIONS

Left-Right Adjustability	Yes
Installation Method	Hexagon Screws (HEX 5) Quick-Fix
Minimal Distance Gate - Post	13 mm
Materials Main Part(s)	Aluminium Polypropylene Stainless Steel
Hours of Salt Spray Testing	500
Test Frequency	500000
Years of Warranty	3