




3-way adjustable hot-dip galvanized 180° hinge. Depth and spacing between gate and post are adjustable after installation. The welding parts are available in black steel or zinc plated.

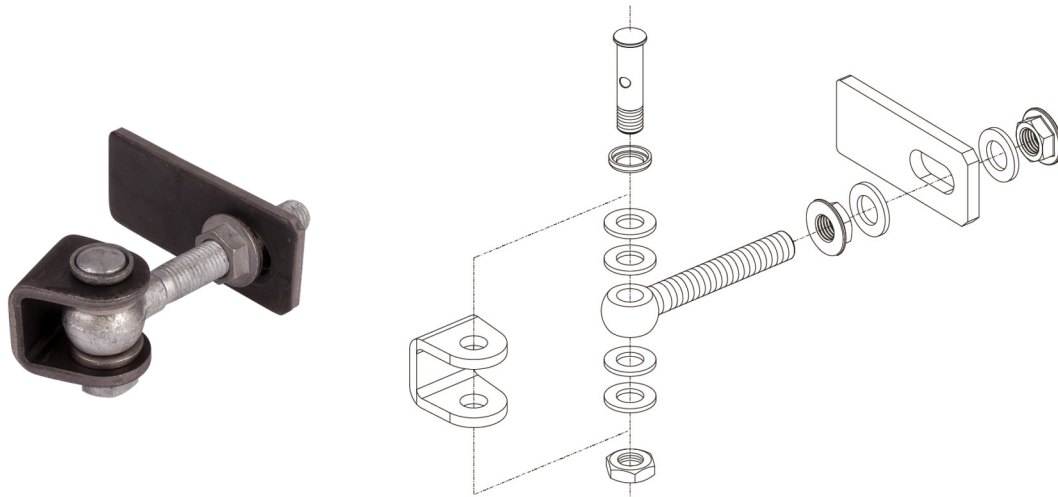

TECHNICAL SPECIFICATIONS

Minimal Distance Gate - Post	6 mm; 8 mm; 12 mm
Gate Weight	100 kg 200 kg 250 kg 400 kg 440 kg
Horizontal Adjustability	M12: 41 mm M16: 51/91 mm M18: 36/82 mm M20: 55/65 mm M22: 61/76 mm
Vertical Adjustability	x
Materials Main Part(s)	Hot Dip Galvanised Steel Steel
Hours of Salt Spray Testing	500
Test Frequency	500000
Years of Warranty	3