


Electromagnetic locks

MAGUNIT2500



<https://www.locinox.com/en-gb/gate-hardware/locks/electromagnetic-locks/p00007690>

Set with a MAG and anchor plate along with fittings to combine with a N-LINE-B-MAG or N-LINE-S-MAG, 1 or more MAGUNITs can be mounted in the N-LINE profile.

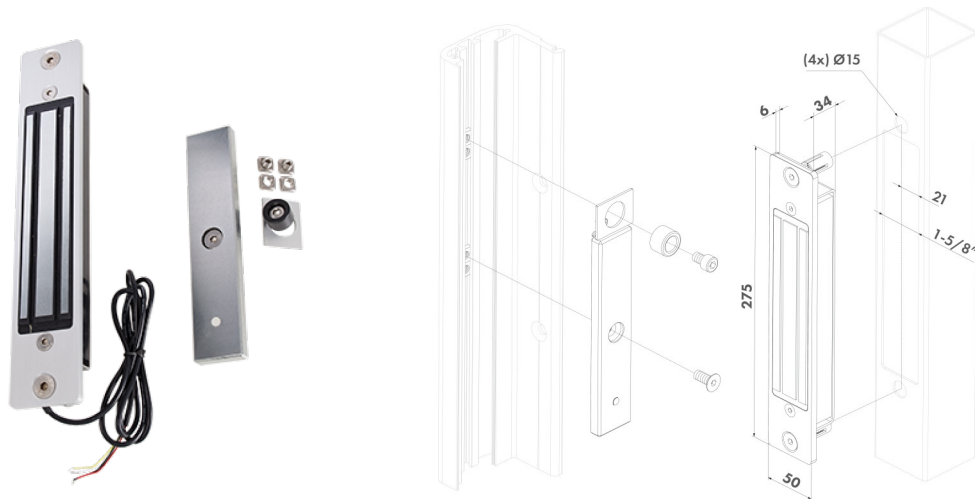

TECHNICAL SPECIFICATIONS

Left-Right Adjustability	Yes
Installation Method	Quick-Fix Screws
Profile Type	Flat Square
Operating Voltage	12V DC / 24V DC
Operating Current	460mA (12V) or 230mA (24V)
IP Rating	68
Length Provided Cable	1100 mm
Materials Main Part(s)	Powder Coated Aluminium Special Two Layer Protective Coating
Norms	ISO 9227
Hours of Salt Spray Testing	500
Test Frequency	500000
Years of Warranty	2