


Keypads

SLIMSTONE-X



<https://www.locinox.com/en-gb/access-control/keypads/p00009886>

The durable and robust SlimStone-X keypad has been developed to work with the SwitchStone-STD relay module. When both combined, the SlimStone-X ensures maximum security against burglary thanks to 2 external relays, both with a common, Fail Open and Fail Close contact. The keypad is easy in installation and configuration, and is developed and tested for use in the most extreme weather conditions (IP68).

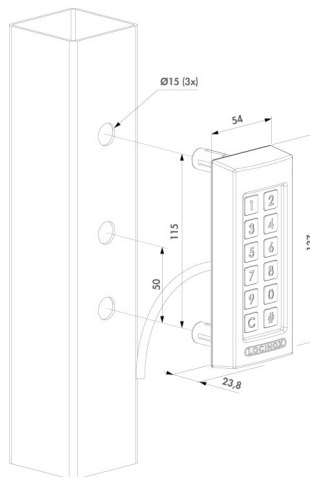

TECHNICAL SPECIFICATIONS

Installation Method	Hexagon Screws (HEX 5) Quick-Fix
Profile Type	Flat Square
Operating Current	520mA (with heating)
Power	1,5 W (> 5°C) + 12 W at max heating (< -25°C)
IP Rating	68
Relays	External 2x COM-NO-NC
Length Provided Cable	2000 mm
Materials Main Part(s)	Powder Coated Aluminium Resin Encapsulated PCB Stainless Steel
Temperature Range	-30°C / 85°C
Norms	X
Hours of Salt Spray Testing	500
Test Frequency	1,000,000
Years of Warranty	2